


Mono Tower


ALUMINIUM TOWER SYSTEM

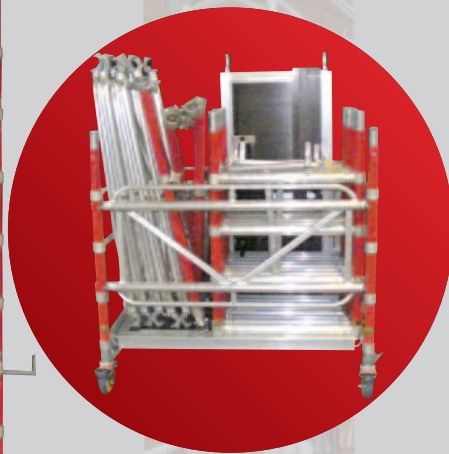

Mono Tower

ALUMINIUM TOWER SYSTEM

The Mono Tower is easy and quick to set up and can be erected by one person. This compact tower gives up to 4m of platform height and can be transported in a small van.

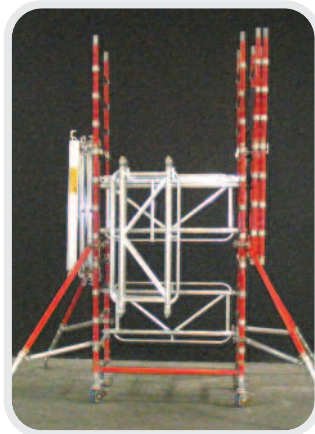

Mono Tower can be erected safely and quickly with one pair of hands.



key features

1. Compact access tower for up to 4m applications (6m working height)
2. Can be erected safely and efficiently by one person
3. 2nd frames offer a sure stable structure
4. Tower parts fit into mobile base, for easy movement to the workplace
5. Can be transported in a small van



Technical data of mono tower system

Max. safe tower loading capacity	360kg
Max. safe platform loading capacity	360kg
Max. platform height	4m
Max. working height	6m
Total weight of 2m tower	96.7kg
Total weight of 4m tower	148.2kg
Length of the tower	1.29m
Castors	113mm
Construction, high strength aluminium alloy	Rib-Grip
Self-locking brace hooks	Standard
Integral ladder frame	Standard
Levelling adjustability	Standard
	Telescopic Outrigger
EN-1004	Fully Compliant
Work at height directive	Fully Compliant
Local assembly manual	Available

T & C's apply

INSTANT UPRIGHT

Instant UpRight Ltd.

Unit S1, Park West Industrial Park,
Friel Avenue, Nangor Road,
Dublin 12, Ireland.

T: +353 (0)1 6209300

F: +353 (0)1 6209301

2 KeJi Zhong Road,
SongXia Industrial Park,
SongGang Town,
NanHai District, Foshan,
GuangDong Province,
China 528234

T: +86 757 8520 8980

F: +86 757 8520 8981

E: info@instantupright.com
www.instantupright.com



INSTANT UPRIGHT
App available now on the app store



For safe use and assembly please refer to manufacturer's assembly guide. Specifications are subject to change without notice. The photographs in this brochure are for promotional purposes only.

(QD 117)